



- ▶ High speed and precision
- ▶ Suitable for various thickness and material sheet  
Angle range from 30°-140°
- ▶ With punching function up to 40mm diameter
- ▶ Gauge device for convenient sheet metal location
- ▶ Sheetmetal holding device for good shearing edge
- ▶ Auto adjusting for blade clearance

**HNM-6A**



Adjust angle by handwheels



Punching hole



Angle gauge device

Item No.	372411
Model	HNM-6A
Max.Cutting Length (mm)	200
Max.Thickness (mm)	6
Cutting Angle	30°-140°
Max. travel (mm)	42
Max. punching dia. (mm)	40
System pressure (mpa)	18
Motor Power (kW)	4
Overall dimension (cm)	106×90×121
Packing Size (cm)	120×105×142
N.W./G.W.(kg)	1020/1100




**HNM-6**



Steel chip slide down


- ▶ Cuts up to 6.5mm
- ▶ 250×250mm notch size
- ▶ Notching angle fixes in 90° with high notching speed
- ▶ Compact structure
- ▶ Convenient operation
- ▶ Auto adjusting for blade clearance

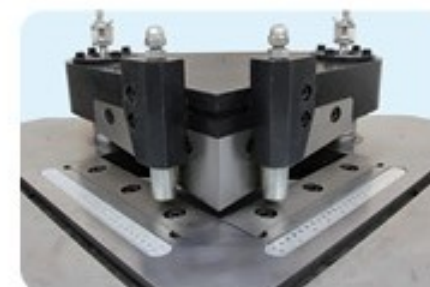

Sheet metal compactor



Control panel

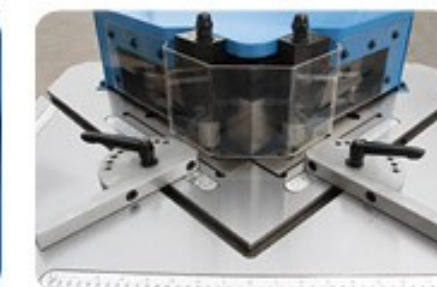

Head

Item No.	372410
Model	HNM-6
Cutting Angle	90°
Max.Cutting Length (mm)	250
Max.Cutting Thickness (mm)	6.5
No. of stroke (per minute)	24
Size of Working Table (mm)	810x750
Motor Power (kW)	4
Motor Speed (rpm)	1440
Oil Tank Volume(L)	35
Max.Working Pressure(Mpa)	12
Packing Size (cm)	101×85×137
N.W./G.W.(kg)	630/675